



Autol leveling Spacers

Special Profiles provides a complete system of autoleveling spacers, for leveling floors during installation.

These products, an integral part of the line of accessories for installation, allow to facilitate and greatly improve a perfect installation of coverings, tiles, stones.

Through these system, you can also drastically reduce the installation time.

Available for levels from 0 to 22, they are manufactured with robust high density polyethylene.

In convenient bags of 250/500 pcs each, they are accompanied by a label with product code and description and EAN code.

- Material: PE-HD, High density polyethylene.
- Finish: Gray
- Dimensions: from 1 to 22 mm.
- Quantity per pack: Bags of 250/500 pcs.
- Item Name: SPECIAL-DCU-PVC
- SPECIAL-DCUX-PV • SPECIAL-TC-PVC

	Dimension/Size S		PVC nero <i>Black PVC</i>	Quantità per conf. <i>Packing Quantity</i>
SPECIAL-DCU-PVC	mm	Cod. Art./Item Code	€/busta/bag	pz/pcs

PVC PVC



0-5	SPDU0005PVG		40 buste da 500 pz 40 bag-500 pcs/bag
0-10	SPDU0010PVG		16 buste da 500 pz 16 bag-500 pcs/bag

Distanziatori autolivellanti

Self leveling spacers

	Dimension/Size S		PVC nero <i>Black PVC</i>	Quantità per conf. <i>Packing Quantity</i>
SPECIAL-DCUX-PVC	mm	Cod. Art./Item Code	€/busta/bag	pz/pcs

PVC PVC




22	SPDU0022PVG		4 buste da 250 pz 4 bag-250 pcs/bag
----	-------------	--	--

	Altezza mattonelle <i>Tiles height</i>	Dimensioni <i>Size</i> S	Colore <i>Colours</i>		PVC nero <i>Black PVC</i>	Quantità per conf. <i>Packing Quantity</i>
SPECIAL-TC-PVC	mm	mm		Cod. Art./Item Code	€/busta/bag	pz/pcs

PVC PVC




3-12	0,5	verde/green	SPDR0005PVG		10 buste da 250 pz 10 bag-250 pcs/bag
3-12	1	grigio/grey	SPDR0001PVG		
3-12	1,5	blu/bleu	SPDR0015PVG		
3-12	2	bianco/white	SPDR0002PVG		
3-12	3	giallo/yellow	SPDR0003PVG		
10-20	2	arancio/orange	SPDR0020PVG		8 buste da 250 pz 8 bag-250 pcs/bag

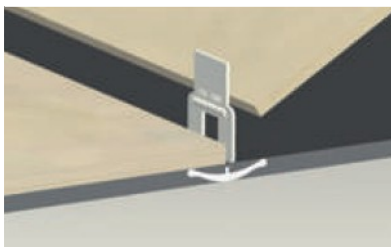

Insert the tie-beam

Insert the wedge in the cleft



Remove the wedges hitting the tie-beams, once the glue is dried.

Main characteristics of the raw materials used by Special Profiles

ALUMINUM

Aluminum alloy (Al-Mg-Si) The profiles are made by extrusion or lamination and subsequent press bending. They have excellent resistance to the main chemical and atmospheric agents.

Surface treatments through the company's proprietary systems, transform the material into:

Anodized aluminum: anodic oxidation with 8-10 microns of oxide thickness.

Polished Aluminum: anodic oxidation with 8-10 microns of oxide thickness.

Painted Aluminum: powder coated, with about 100 microns of paint thickness.

Not recommended for floor use.

STAINLESS STEEL - AISI 304

The profiles are made by rolling and subsequent press bending. They have excellent resistance to the main chemical and atmospheric agents and excellent mechanical resistance

Surface treatments through the company's systems, transform the material into:

Polished and bright steel. Use both on the wall and on the floor, in hospitals, food, industry.

• Attention: the cutting edges are not stainless

Rigid PVC (Corner protectors)

Lead-free, impact-resistant, self-extinguishing rigid vinyl chloride. Good mechanical and abrasion resistance.

Co-extruded PVC - Rigid / Soft (expansion joints)

Co-extruded rigid vinyl chloride with soft PVC, leadfree, shockproof, self-extinguishing. Excellent mechanical resistance, to abrasion.

PE-HD (Tile spacers)

High density polyethylene, thermoplastic resin, excellent chemical stability and mechanical resistance. The high density (HD) increases its stiffness.

POLYPROPYLENE (External square and round corners)

Thermoplastic polymer, semi-crystalline, with good mechanical and abrasion resistance.

Maintenance

Avoid direct contact with concrete and its derivatives, if wet, descaling products and detergents that contain chlorine. Avoid using abrasive products that can scratch (abrasive sponges / metal wool). Immediately after laying proceed with a thorough cleaning of the surfaces with plenty of water / neutral / non-alkaline PH products, in particular remove cement, glue from the exposed surfaces.

Measures and tolerances

All information and drawings contained in this catalog are non-binding and subject to change without notice.

All dimensional data refer to nominal dimensions, subject to mechanical tolerances, according to the En- 22768 ISO-2768 -m standard.

Special Profiles codes/Descriptions

Raw Material

A= Aluminium
F= Iron
P= PVC
I= Steel
O= Brass

Colours

A=Silver B=Light Brown
O=Gold M=Brown
N=Black
B=White
G=Gray

Surface treatments

N=Natural Z=Zincked
A=Anodized L=Bright
V=Painted O=Matt
P=Brushed S=SuperBright
B=Brilliant



Special Profiles a brand of Mecc.AI Group

- Via dei Laghi, 4 - Calcinelli 61036 Colli al Metauro (PU) – Italia Tel. +39.0721.8764.163

Website : www.special-profiles.com **e-mail:** specialprofiles@meccal.com