


Hygienic connection profiles

| Dimensioni Size | Lunghezza Length | Cod. Art./Item Code | Profili Anodizzati Argento Silver Anodized Profiles | | | | Quantità per conf. Packing Quantity |
|--------------------|---------------------|---------------------|--|------|----------------------------|------|--|
| | | | Satinato Silver | | Brillante Bright Silver | | |
| mm | m | | €/m | €/pz | €/m | €/pz | pz/pcs |

Special Profiles designs and manufactures a complete series of hygienic fittings, specific to protect and keep clean edges and corners of bathrooms, but also industrial premises such as butchers, pastry shops, restaurants, etc.


| SPECIALSANIT-AL | 18x18 | 2,7 | SPSA0020AAA27 | | | | | 10 |
|-----------------|-------|-----|---------------|--|--|--|--|----|
|-----------------|-------|-----|---------------|--|--|--|--|----|

ALLUMINIO ALUMINIUM



| SPECIALPROTEC-AL | 10x10 | 2,7 | SPPR0010AAA27 | | | | | 10 |
|------------------|-------|-----|---------------|--|--|--|--|----|
|------------------|-------|-----|---------------|--|--|--|--|----|

ALLUMINIO ALUMINIUM




Produced in aluminum, steel and PVC, there are different sizes available.

The profiles are for overlay or underlay and special preformed pieces are available for the corners, edges and ends.

All products are coded with label with product code and description and EAN code.

| SPECIALSANIT-PVC | Dimensioni Size H | Lunghezza Length | Cod. Art./Item Code | PVC bianco White PVC | | Quantità per conf. Packing Quantity |
|------------------|-------------------------|---------------------|---------------------|-------------------------|------|--|
| | mm | m | | €/m | €/pz | pz/pcs |
| PVC PVC | 45 | 2 | SPSA4545PVB2 | | | 10 |



| SPECIALPROTEC-PVC | 8 | 2,6 | SPPR0008PVB26 | | | 20 |
|-------------------|----|-----|---------------|--|--|----|
| PVC PVC | 10 | 2,6 | SPPR0010PVB26 | | | |






| SpecialCapPI-PVC | 8 | | SPPI0008PB00 | | | 10 |
|------------------|----|--|--------------|--|--|----|
| PVC PVC | 10 | | SPPI0010PB01 | | | |



| SpecialCapPE-PVC | 8 | | SPPE0008PB00 | | | 10 |
|------------------|----|--|--------------|--|--|----|
| PVC PVC | 10 | | SPPE0010PB01 | | | |

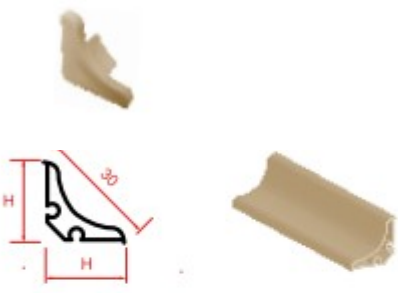

| | | | | | | |
|-------------------------|---|--|--------------|--|--|----|
| SPECIALSANIT-PVC | 20 | | SPTR2020PB00 | | | 10 |
| PVC PVC |  | | | | | |
| SPECIALCAPSI-PVC | 20 | | SPCI2020PB00 | | | 10 |
| PVC PVC |  | | | | | |
| SPECIALCAPSE-PVC | 20 | | SPCE2020PB00 | | | 10 |
| PVC PVC |  | | | | | |

Material: PVC, Aluminum or Steel • Finish: White, satin aluminum, polished aluminum, polished steel • Dimensions: as per the technical data sheets reported below. • Quantity per pack: 10 or 20 pieces, depending on the specific product.

Main characteristics of the raw materials used by Special Profiles

ALUMINUM

Aluminum alloy (Al-Mg-Si) The profiles are made by extrusion or lamination and subsequent press bending. They have excellent resistance to the main chemical and atmospheric agents. Surface treatments through the company's proprietary systems, transform the material into:
 Anodized aluminum: anodic oxidation with 8-10 microns of oxide thickness.
 Polished Aluminum: anodic oxidation with 8-10 microns of oxide thickness.
 Painted Aluminum: powder coated, with about 100 microns of paint thickness.
 Not recommended for floor use.

STAINLESS STEEL - AISI 304

The profiles are made by rolling and subsequent press bending. They have excellent resistance to the main chemical and atmospheric agents and excellent mechanical resistance

Surface treatments through the company's systems, transform the material into:

Polished and bright steel. Use both on the wall and on the floor, in hospitals, food, industry.

• Attention: the cutting edges are not stainless

Rigid PVC (Corner protectors)

Lead-free, impact-resistant, self-extinguishing rigid vinyl chloride. Good mechanical and abrasion resistance.

Co-extruded PVC - Rigid / Soft (expansion joints)

Co-extruded rigid vinyl chloride with soft PVC, leadfree, shockproof, self-extinguishing. Excellent mechanical resistance, to abrasion.

PE-HD (Tile spacers)

High density polyethylene, thermoplastic resin, excellent chemical stability and mechanical resistance. The high density (HD) increases its stiffness.

POLYPROPYLENE (External square and round corners)

Thermoplastic polymer, semi-crystalline, with good mechanical and abrasion resistance.

Maintenance

Avoid direct contact with concrete and its derivatives, if wet, descaling products and detergents that contain chlorine. Avoid using abrasive products that can scratch (abrasive sponges / metal wool). Immediately after laying proceed with a thorough cleaning of the surfaces with plenty of water / neutral / non-alkaline PH products, in particular remove cement, glue from the exposed surfaces.

Measures and tolerances

All information and drawings contained in this catalog are non-binding and subject to change without notice.

All dimensional data refer to nominal dimensions, subject to mechanical tolerances, according to the En- 22768 ISO-2768 -m standard.

Special Profiles codes/Descriptions

Raw Material

A= Aluminium

F= Iron

P= PVC

I= Steel

O= Brass

Colours

A=Silver

B=Light Brown

M=Brown

O=Gold

N=Black

B=White

G=Gray

Surface treatments

N=Natural

Z=Zincked

A=Anodized

L=Bright

V=Painted

O=Matt

P=Brushed

S=SuperBright

B=Brilliant



Special Profiles a



brand of Mecc.Al Group



- Via dei Laghi, 4 - Calcinelli 61036 Colli al Metauro (PU) – Italia Tel. +39.0721.8764.163

Website : www.special-profiles.com **e-mail:** specialprofiles@meccal.com